


AMWPD-M

下拉式专用螺栓(气动型)

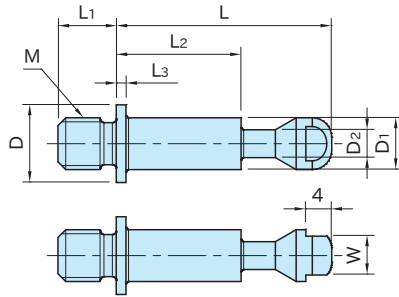

本体
SCM435
淬火回火
四氧化三铁膜

型号	D ₁	M	L ₁	L	D	L ₂	L ₃	D ₂	W	质量 (g)	适用下拉式夹具(气动型) (参照P. 84)
AMWPD40-M 8	8	M 8×1.25	9	38	12	24	1.5	4.3	6	16	AMWPD40-W
AMWPD40-M10		M10×1.5	11							20	
AMWPD63-M12	12	M12×1.75	13	48	20	31.5	2	6.5	10	50	AMWPD63-W
AMWPD63-M16		M16×2	17							64	

使用示例及使用方法

■使用下拉式专用螺栓(气动型)时的推荐间距

