

# BJ152


## 标准压板



BJ152 -08063 ~ 20200



BJ152 -24200、24250

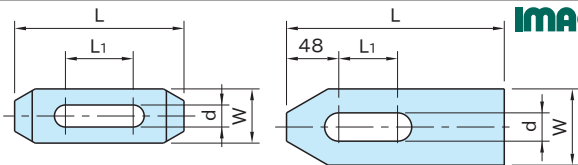

BJ152 -08063 ~ 20200



BJ152 -24200、24250

类型	本体
BJ152 -08063 ~ 20200	S45C 淬火回火 四氧化三铁膜
BJ152 -24200、24250	S45C 涂饰

型 号	L	W	H	d	L <sub>1</sub>	H <sub>1</sub>	夹紧力 (kN)注)	容许紧固扭矩 (N·m)	质量 (kg)
BJ152-08063	63	25	12	9	25	7	6.9	22	0.1
BJ152-08080	80				32				0.15
BJ152-08100	100		16	10	7.8	25			0.24
BJ152-10063	63	25	12	11	25	7	8.5	34	0.1
BJ152-10080	80				32				0.18
BJ152-10100	100		16	10	11.3	45			0.22
BJ152-10125	125	32	19	13	45	13	12.5	50	0.48
BJ152-10160	160				50				0.64
BJ152-12063	63		32	16	13	25			10
BJ152-12080	80	32				0.2			
BJ152-12100	100	19		13	16.7	80	0.34		
BJ152-12125	125	32	25	15	50	15	18.8	90	0.46
BJ152-12160	160				50				0.8
BJ152-16080	80		32	19	17	25			10
BJ152-16100	100	32				0.42			
BJ152-16125	125	38		13	18	115	0.53		
BJ152-16160	160	38	25	21	50	15	20.2	129	0.9
BJ152-20100	100				19				13
BJ152-20125	125		50	30	26	40			15
BJ152-20160	160	50				0.85			
BJ152-20200	200	63		22.9	183	1.54			
BJ152-24200	200	70	35	26	54	-	28.9 ~ 48.9	320	2.65
BJ152-24250	250				79				29.9 ~ 52.8

注) BJ152 -24200、BJ152 -24250的夹紧力(kN), 是突出量max. ~ min.时候的值。

### 注意事项

BJ152 -24200 ~ BJ152 -24250的颜色因生产批次不同, 会有些许差异。