


CT

CT·齿面压块(可调型)

RoHS

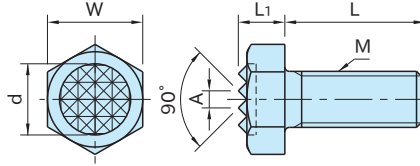

Fairlane

★ One Point
超硬合金衬垫型

| 型号 | M | L | W | L ₁ | d | A | 质量 (g) |
|-------------|----------|----|----|----------------|------|-----|--------|
| CT-06102 | M 6×1 | 12 | 10 | 5 | 7.9 | 2.3 | 6 |
| CT-06100 | | 25 | | | | | 8 |
| CT-08122 | M 8×1.25 | 12 | 13 | 6.4 | 9.5 | 3 | 10 |
| CT-08125×16 | | 16 | | | | | 11 |
| CT-08125 | | 25 | | | | | 15 |
| CT-08125×35 | | 35 | | | | | 17 |
| CT-10125 | M10×1.25 | 25 | 17 | 7.5 | 12.7 | 3 | 20 |
| CT-10125×40 | | 40 | | | | | 33 |
| CT-10152 | M10×1.5 | 12 | 17 | 7.5 | 12.7 | 3 | 25 |
| CT-10150 | | 25 | | | | | 27 |
| CT-10150×40 | | 40 | | | | | 36 |
| CT-12175 | M12×1.75 | 25 | 19 | 8.7 | 15.9 | 2.3 | 42 |
| CT-12175×40 | | 40 | | | | | 55 |
| CT-16200 | M16×2 | 35 | 24 | 11 | 19.1 | 2.3 | 88 |
| CT-16200×50 | | 50 | | | | | 127 |
| CT-20250 | M20×2.5 | 40 | 30 | 13.7 | 25.4 | 2.3 | 133 |
| CT-20250×60 | | 60 | | | | | 231 |

| 本体 | 衬垫 |
|-----------------------------------|---------------|
| SCM440 淬火回火 四氧化三铁膜 HRC32 | 超硬合金 HRC72 |