
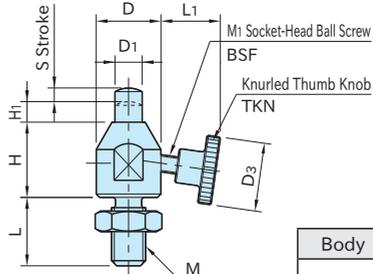


BJ360

COMPACT WORK SUPPORTS



Note: The socket-head ball screw is glued to the knurled thumb knob.

| Body | Piston |
|---------------------------|---------------------------------------------|
| S45C steel Black oxide | SCM440 steel Heat treated Black oxide |

| Part Number | H | H ₁ | S | D ₁ | D | M | L | W | D ₃ | M ₁ | L ₁ |
|--------------------|----|----------------|---|----------------|----|----------|----|----|----------------|----------------|----------------|
| BJ360-08001 | 18 | 5 | 3 | 6 | 15 | M 8×1.25 | 16 | 13 | 16 | M4×0.7-16L | 13.2 |
| BJ360-10001 | 22 | 6 | 4 | 8 | 19 | M10×1.5 | 20 | 17 | 20 | M5×0.8-20L | 16.3 |
| BJ360-12001 | 25 | | | 10 | 22 | M12×1.75 | 24 | 19 | 24 | M6×1 -25L | 22.3 |

| Part Number | Piston Spring Force (N) | Support Capacity (kN) | Weight (g) |
|--------------------|-------------------------|-----------------------|------------|
| BJ360-08001 | 1.5~3.0 | 0.2 | 36 |
| BJ360-10001 | 1.8~3.0 | 0.3 | 72 |
| BJ360-12001 | | 0.4 | 150 |

How To Use

