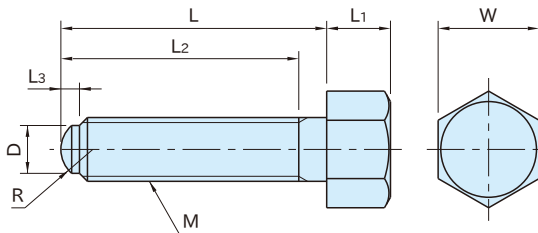


BJ748**CLAMP SCREWS**

Body
Steel(SCM435)
Black oxide finish
Quenched and tempered (Rc 33 - 39)

Part Number	M	L	W	D	L1	L2	L3	R	Clamping Force (kN)	Allowable Screw Torque (N·m)	Weight (g)
BJ748-06030	M 6×1	30	10	4.5	8	27	2.5	R 5	8	10	9
BJ748-06040		40				37					10
BJ748-06050		50				47					12
BJ748-08040	M 8×1.25	40	13	5.5	10	37	3	R 6	16	25	21
BJ748-08050		50				47					24
BJ748-08060		60				57					26
BJ748-10040	M10×1.5	40	17	7.5	12	37	3.5	R 8	25	50	38
BJ748-10050		50				47					42
BJ748-10060		57				57					46
BJ748-12060	M12×1.75	60	19	9	15	55	5	R 9	38	90	70
BJ748-12080		80				75					80
BJ748-12100		100				95					95
BJ748-12125	M16×2	125	24	12	20	120	6	R12	63	200	115
BJ748-16080		80				75					165
BJ748-16100		100				95					185
BJ748-16125	M20×2.5	125	30	15	25	120	7	R15	98	390	215
BJ748-16150		150				145					270
BJ748-20080		80				70					285
BJ748-20100	M20×2.5	100	30	15	25	90	7	R15	98	390	320
BJ748-20125		125				115					365
BJ748-24100		100				90					460
BJ748-24125	M24×3	125	36	19.5	25	115	8	R20	140	670	525
BJ748-24150		150				140					590

How To Use