

BSTCA / BSUCA

HEX. SOCKET-HEAD BALL PLUNGERS




Stainless Steel

Heat resistance: 180°C



BSTCA
(Steel)

BSUCA
(Stainless Steel)

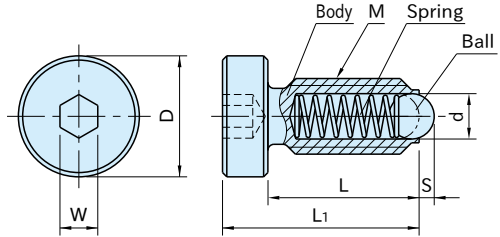


Type	Body	Spring	Ball
BSTCA	SUM22L steel Black oxide finish	SUS302WPA stainless steel	SUJ2 steel HRC60~66
BSUCA	SUS303 stainless steel		SUS420 stainless steel HRC55

Steel	Stainless Steel	M	d	L	S	L ₁	D (⁰ / _{-0.2})	W	Force (N) Initial - Final	Weight (g)
Part Number	Part Number									
BSTCA 4	BSUCA 4	M 4×0.7	2.5	10	0.8	13	7	2	4 - 10	1.5
BSTCA 5	BSUCA 5	M 5×0.8	3	13	0.9	17	8.5	2.5	6 - 11	3
BSTCA 6	BSUCA 6	M 6×1	3.5	12	1	16	10	3	9 - 13	4
BSTCA 8	BSUCA 8	M 8×1.25	5	16	1.5	21	13	4	15 - 30	9
BSTCA10	BSUCA10	M10×1.5	6	20	2	26	16	5	20 - 35	17
BSTCA12	BSUCA12	M12×1.75	8	25	2.5	32	18	6	30 - 55	28

How To Use

Application Example

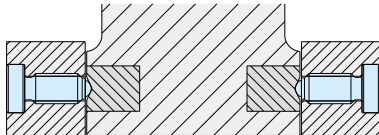

Technical Information

Heat resistance 180°C