




BSU-A / BSUH-A HEX. SOCKET BALL PLUNGERS



BSUH-A
(Heavy-duty) 180°C

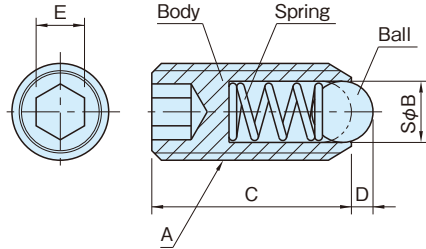

Body	Spring	Ball
Stainless steel (SUS303)	Stainless steel (SUS302WPA)	Stainless steel (SUS420) Heat treated to Rc55

Light-duty		Heavy-duty		A	B	C	D	E	Weight (g)
Part Number	Force (N) Initial - Final	Part Number	Force (N) Initial - Final						
BSU 3A	1.5~ 3	BSUH 3A	5~ 7	M 3×0.5	1.5	9	0.5	1.5	0.2
BSU 4A	4 ~ 10	BSUH 4A	12~ 22	M 4×0.7	2.5	10	0.8	2	0.5
BSU 4AL		-	-			16			0.9
BSU 5A	6 ~ 11	BSUH 5A	19~ 30	M 5×0.8	3	14	0.9	2.5	1.3
BSU 5AL		-	-			20			1.8
BSU 6A	9 ~ 13	BSUH 6A	28~ 40	M 6×1	3.5	15	1	3	2
BSU 6AL		-	-			25			3
BSU 8A	15 ~ 30	BSUH 8A	47~ 73	M 8×1.25	5	18	1.5	4	4
BSU 8AL		-	-			30			7
BSU10A	20 ~ 35	BSUH10A	66~100	M10×1.5	6	23	2	5	8
BSU10AL		-	-			35			14
BSU12A	30 ~ 55	BSUH12A	66~120	M12×1.75	8	26	2.5	6	12
BSU12AL		-	-			40			22
BSU16A	65 ~125	BSUH16A	90~180	M16×2	10	33	3.5	8	31
BSU16AL		-	-			45			47
BSU20A	80 ~160	BSUH20A	115~240	M20×2.5	12	43	4.5	10	64
BSU24A	90 ~180	BSUH24A	130~270	M24×3	15	48	5.5	12	100

- Can be used with Ball Detents (**BLB**).
- Heat resistance : 180°C for **BSU-A** **BSUH-A** types
- Identification lines are marked at the back end : two for BSUH-A type.