


# CP156-M

## CLAMPING SCREWS

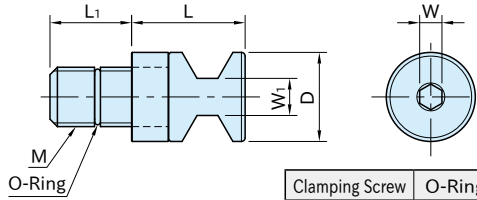

### ★Key Point

Accommodates workpieces prone to distortion

Clamping Screw	O-Ring	Spacer
SCM435 steel Quenched and tempered Black oxide finished	Nitrile rubber (NBR)	S45C steel Black oxide finished

Part Number	M	L <sub>1</sub>	D	L	W <sub>1</sub>	W	O-Ring Size for Replacement	Weight (g)	Applicable Clamping Module
CP156-12001M	M12×1.75	18	18	23.5	7	5	S 8 (CS1.5 ID 7.5)	50	CP150-12063, CP151-12125 CP152-12080
CP156-16001M	M16×2	22	24	30.6	10	6	S12 (CS1.5 ID11.5)	120	CP150-16080, CP151-16160 CP152-16100
CP156-20001M	M20×2.5	30	33	38.9	14	8	S16 (CS1.5 ID15.5)	280	CP150-20100

Note: The O-ring is used to prevent rotation and maintain the orientation of the clamping screw.  
When the O-ring loses effectiveness, replace it with a commercially available equivalent.

### Reference

Features and How to Use