


# CP165-L

# TAPERED CLAMPING SCREWS

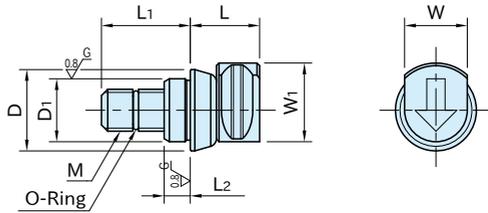

Tapered Pin	Clamping Screw	O-Ring
S45C steel	SCM435 steel	Nitrile rubber (NBR)
Black oxide finished	Quenched and tempered	
Precision ground	Black oxide finished	

Part Number	M	D <sub>1</sub> (g6)	L <sub>2</sub>	L <sub>1</sub>	D	L	W <sub>1</sub>	W	O-Ring Size for Replacement	Weight (g)	Proper Clamping Module
<b>CP165-08001L</b>	M 8×1.25	12	5	17	15.5	13	15	12	SS050(CS1 /ID 5)	22	CP160-08040R,CP160-08040L
<b>CP165-12001L</b>	M12×1.75	18	6	24	24.5	21.5	23.5	19	S 8 (CS1.5 /ID 7.5)	81	CP160-12063R,CP160-12063L
<b>CP165-16001L</b>	M16×2	22	7.5	30	31.5	27	30	24	S 12 (CS1.5 /ID11.5)	170	CP160-16080R,CP160-16080L

## Reference

Feature and How To Use in later page