

# CP722

## ONE-TOUCH CLAMPING LOCATORS





**CP722-0840R-06**




**CP722-0840R-06N**

Body / Shank	Tapered Pin	Handle	Pin
SCM440 steel Black Oxide Finished	SCM440 Nitrocarburized	ZDC1 die-cast zinc Silver-gray painted	SUS303 stainless steel

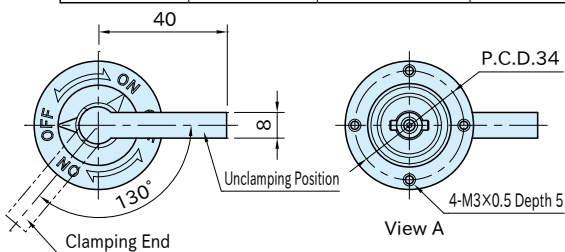

**CP722-0840R-06**



**CP722-0840R-06N**

Part Number	Tapered Pin	Clamping Force (N)	Lifting Force (N)*	Weight (g)	Locating Receivers
<b>CP722-0840R-06</b>	With	600	100	220	<b>CP727-0840R</b>
<b>CP722-0840R-06N</b>	Without	700	—	215	


\*) The lifting force is the power of the inner spring of the body to push up the movable tapered pin.

For maximum loading weight and locating repeatability, see How To Use ONE-TOUCH FLEX LOCATORS (Handle / Knob).


### How To Use

#### ■ Mounting Hole Dimension

Can be used with plates of 10mm ~ 22mm thickness.

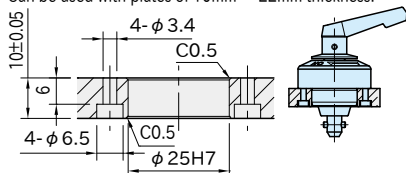

Installation on 10mm-thick Plate

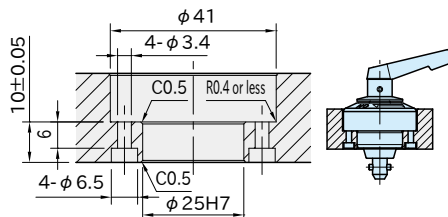

Installation on 10mm-22mm Thick Plate  
Drill a counterbored hole.

### Reference

How To Use ONE-TOUCH FLEX LOCATORS  
(Handle / Knob)

### Supplied With

4 of M3x0.5-10L Hex Socket-Head Cap Screw