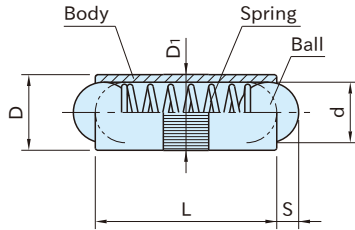


DSB**DOUBLE BALL PLUNGERS**

| Body | Spring | Ball |
|-------|-----------------------------|--------------------------|
| Brass | Stainless steel (SUS302WPA) | Stainless steel (SUS420) |

| Part Number | D | D ₁ (^{+0.05} / ₀) | d | L (_{-0.2} / ₀) | S | Weight (g) | Force (N) |
|----------------|-----|---|-----|---|------|---------------|-----------------|
| | | | | | | | Initial - Final |
| DSB 2.5 | 2.5 | 2.55 | 2 | 6 | 0.65 | 0.2 | 1.5 ~ 2.8 |
| DSB 3 | 3 | 3.05 | 2.5 | 8 | 0.8 | 0.4 | 2.5 ~ 6 |
| DSB 4 | 4 | 4.05 | 3 | 10 | 0.9 | 0.7 | 3 ~ 7 |
| DSB 5 | 5 | 5.05 | 4 | 12 | 1.2 | 1.3 | 4 ~ 8 |
| DSB 6 | 6 | 6.05 | 5 | 16 | 1.6 | 2.4 | 6 ~ 10 |
| DSB 8 | 8 | 8.05 | 6 | 20 | 2 | 5.8 | 8 ~ 12 |
| DSB10 | 10 | 10.05 | 8 | 24 | 2.9 | 10.5 | 10 ~ 16 |

How To Use

Tolerance of mounting holes : 0 to +0.04

■ Installation Example

