


**★ Key Point**  
 Can keep door opened at desired position by locking handle.

Body	Pivot Pin	Handle	Locking Element
Polyamide plastic Black matte	Steel Black oxide finish	Glass-fiber reinforced polyamide plastic Black matte	Steel Black oxide finish

Part Number	W	L	S (±0.25)	P (±0.25)	H	T	d	d <sub>1</sub>	E	A	R	B	H <sub>1</sub>	H <sub>2</sub>	Weight (g)
<b>EFHL5050HH</b>	48	49.5	31	30.5	19	11	10	5.5	13	17	44	52	29	36	40
<b>EFHL6565HH</b>	64	65	40	40	23	13.5	11.5	6.5	15	24					75
<b>EFHL9797HH</b>	97.5	96.5	62.5	59.5	35	20.5	20	10.5	23	35	63	73.5	37	48	240

### How To Use

- To clamp the hinge, push down the handle to engage the teeth with the locking element.
- Once the handle is released, the return spring disengages the teeth from the locking element to set the handle free.

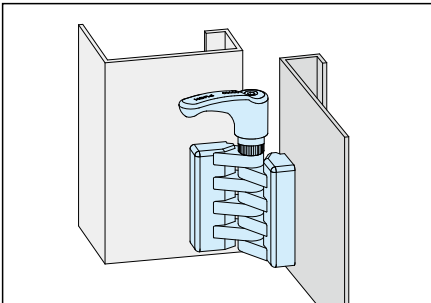

### Feature

The adjustable handle allows keeping the opened door at a desired position and adjusting door opening/closing force.

### Technical Information

- Pivot angle : Max. 215°
- Working temperature : Between -20°C and 80°C

### Note

Use in hot or highly humid circumstances can deteriorate the plastic material properties.