


# ISK-1

## PROTECTION CAPS FOR SOCKET-HEAD CAP SCREWS



Material : Polyamide plastic  
Color :Black



Part Number	D	H	T	Socket-Head Cap Screws		Weight (g)	Qty. Supplied Per Bag
				Thread Size	Across Flats		
ISK 6-1-T 4/D13	13	2	4	M 8	6	0.3	20
ISK 8-1-T 5/D16	16		5	M10	8	0.5	20
ISK10-1-T 6/D18	18	2.5	6	M12	10	0.8	20
ISK12-1-T 7/D21	21	3	7	M14	12	1.3	20
ISK14-1-T 8/D24	24		8	M16	14	2	20
ISK 17-1-T 10/D30	30	4	10	M20	17	3.1	10
ISK19-1-T 12/D36	36	4.5	12	M24	19	5.5	10


### Features:

Cap that keeps corrosion and dirt out of the hex socket of socket-head cap screws.  
Can be used repeatedly.  
Designed for installation and removal with a screwdriver or the like.

### Technical Information

Heat resistance : 160°C (long-term)  
220°C (short-term)

### How To Use

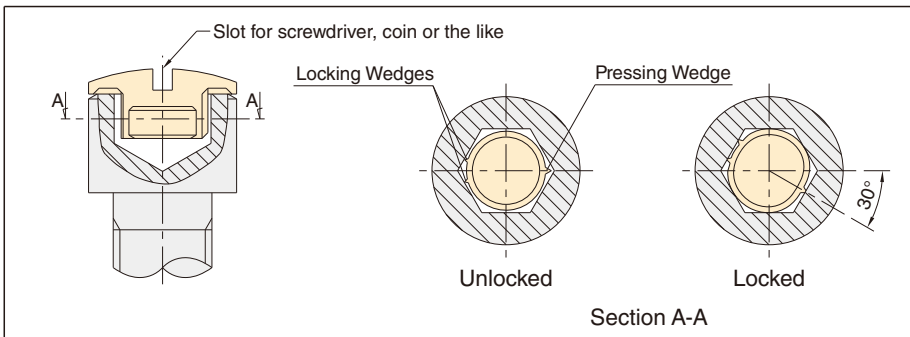

Once a cap is given a 30° turn by using a screwdriver or coin, the 3 wedges on the cylinder are pressed against two flats of the hex socket to generate a strong grip for positive locking. When turned in the opposite direction, the cap gets unlocked for removal.