


# ISK-2

## PROTECTION CAPS FOR SOCKET-HEAD CAP SCREWS



Material : Polyamide plastic  
Color :Black

Part Number	D	H	T	Socket-Head Cap Screws		Counterbores		Weight (g)	Qty. Supplied Per Bag
				Thread Size	Across Flats	Dia	Depth		
<b>ISK 6-2-T 4/D18</b>	18	2	4	M 8	6	15 Dia	9	0.4	20
<b>ISK 8-2-T 5/D20</b>	20		5	M10	8	18 Dia	11	0.6	20
<b>ISK10-2-T 6/D24</b>	24	2.5	6	M12	10	20 Dia	13	0.9	20
<b>ISK12-2-T 7/D26</b>	26	3	7	M14	12	24 Dia	15	1.4	20
<b>ISK14-2-T 8/D30</b>	30		8	M16	14	26 Dia	17.5	2.2	20
<b>ISK17-2-T10/D36</b>	36	4	10	M20	17	33 Dia	21.5	3.3	10
<b>ISK19-2-T12/D43</b>	43	4.5	12	M24	19	40 Dia	25.5	6.1	10

### Features:

Cap that keeps corrosion and dirt out of the hex socket of socket-head cap screws and counterbores for the socket head of cap screws.

Can be used repeatedly.


Designed for installation and removal with a screwdriver or the like.

### Technical Information

Heat resistance : 160°C (long-term)

220°C (short-term)

### How To Use

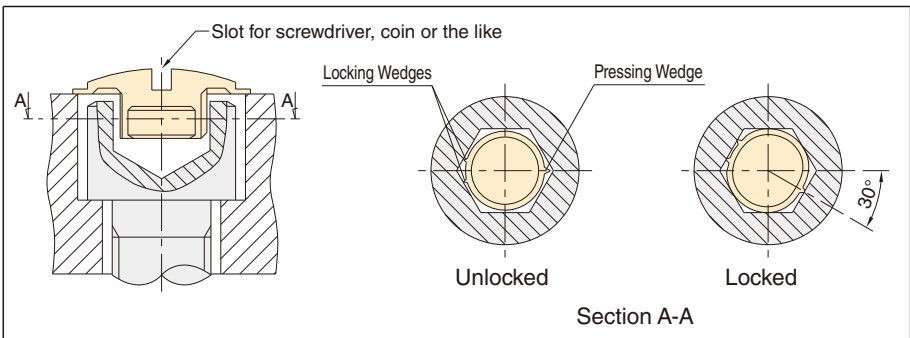

Once a cap is given a 30° turn by using a screwdriver or coin, the 3 wedges on the cylinder are pressed against two flats of the hex socket to generate a strong grip for positive locking. When turned in the opposite direction, the cap gets unlocked for removal.