

# LG-N / LE OIL LEVEL INDICATORS




ELESA Original Design HRT. & HE.



**LG-N**  
(Black Body)



**LE**  
(Clear Body)

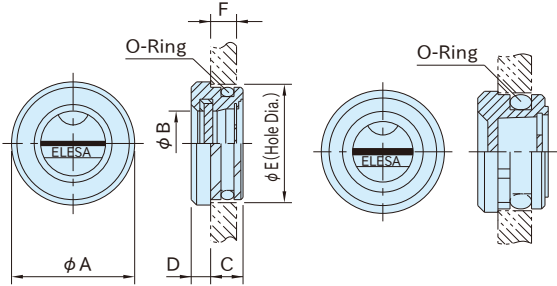

**LG-N**  
(Black Matte Body)

**LE**  
(Clear Body)

Type	Body	Window	Indicator Panel	O-Ring
<b>LG-N</b>	Polyamide plastic Black Matte	Special clear polyamide plastic (PA-T/AR)	Aluminum (A1050P)	Nitro rubber (NBR)
<b>LE</b>	Polycarbonate plastic Clear			

**LG-N** (Black Matte Body)

Part Number	A	B	C	D	E (H11)	F (min)	Weight (g)
<b>LG-15N</b>	28	14.5	9	4.5	26 <sup>+0.130</sup> <sub>0</sub>	6	6
<b>LG-20N</b>	36	18	10.5		32 <sup>+0.160</sup> <sub>0</sub>	8	10
<b>LG-25N</b>	42	23	11	5	38 <sup>+0.160</sup> <sub>0</sub>	9	12
<b>LG-40N</b>	64	40		5.5	60 <sup>+0.190</sup> <sub>0</sub>		29

**LE** (Clear Body)

Part Number	A	B	C	D	E (H11)	F (min)	Weight (g)
<b>LE-17</b>	18	9	7	3	17 <sup>+0.110</sup> <sub>0</sub>	5	2
<b>LE-20</b>	21	12	8		20 <sup>+0.130</sup> <sub>0</sub>	6	3
<b>LE-26</b>	28	17			26 <sup>+0.130</sup> <sub>0</sub>	5	
<b>LE-30</b>	32	20	9	4	30 <sup>+0.130</sup> <sub>0</sub>	7	7
<b>LE-35</b>	38	25			35 <sup>+0.160</sup> <sub>0</sub>	8	10
<b>LE-40</b>	43	28			40 <sup>+0.160</sup> <sub>0</sub>	9	13
<b>LE-45</b>	47	32	11	5	45 <sup>+0.160</sup> <sub>0</sub>	9	18

- Press-in mounting
- When mounting, dab at the indicator kept on the level with a plastic hammer. It is recommended that a wooden plate be placed on the indicator to avoid damage to the plastic surface.
- Working temperature : Between -30°C and 100°C
- The **LE** type is unresistant to alcohol.
- Do not mount **LG-N** indicators on the water tank to avoid them from expanding due to water absorption.

**Installation Instructions**

- Chamfer mounting holes to 1×45°.
- Greasing the O-ring makes installation easier.