


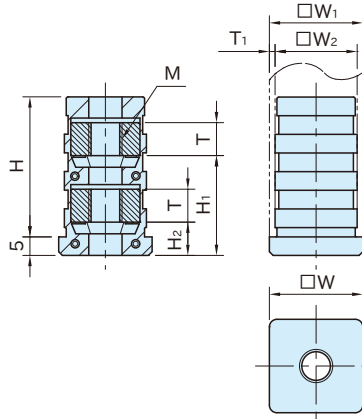

NDEQ25 -M10, M12

NDEQ30A -M10

NDEQ20 -M8

NDEQ30A -M8

NDEQ25 -M8

NDEQ30B -M8, M10

NDEQ25 -M10, M12

NDEQ30A -M10

NDEQ20 -M8

NDEQ30A -M8

NDEQ25 -M8

NDEQ30B -M8, M10

Body	Nut
Polyamide plastic	Steel
Black matte	Zinc plated

Part Number	W	W ₁	T ₁	W ₂	M	T	H ₁	H ₂	H	Static Load Capacity (N) *	Weight (g)	
NDEQ20 -M 8	20	20	1.5	17	M 8×1.25	6.5	30	10.5	37	3000	17	
NDEQ25 -M 8	25	25	1.5	22	M 8×1.25	6.5	30	10.5	36		23	
NDEQ25 -M10					M10×1.5	8	29.5	10	37		33	
NDEQ25 -M12	30	30	1.5	27	M12×1.75	10	27	8	37		41	
NDEQ30A-M 8					M 8×1.25	6.5	30	10.5			37	32
NDEQ30A-M10					M10×1.5	8	29.5	10				44
NDEQ30B-M 8					M 8×1.25	6.5	30	10			31	
NDEQ30B-M10	M10×1.5	8	29.5	42								

Features:

The tapered internal shape ensures connection of the tube and the end cap by tightening the nuts.

*) The allowable load shown is the value when attach the end cap on a steel square tube. If attach the end cap on an aluminum square tube, the value will be reduced by 25%.

Technical Information

Working temperature : -30 to 100°C