


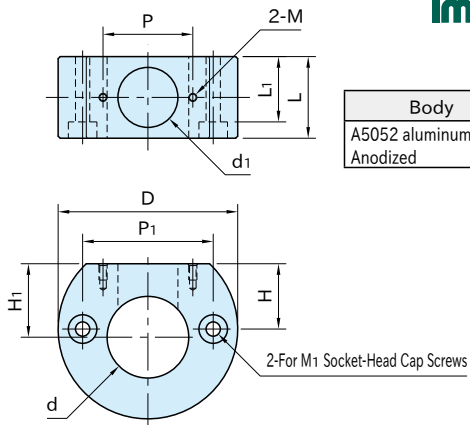

Body
A5052 aluminum alloy Anodized

Part Number	d (+0.2 +0.1)	H ₁	D	L	P	M	d ₁	P ₁	H	M ₁	L ₁	Shaft Dia.)		
QCPSC0828-10	10	11	40	20	22	M2×0.4 Depth 4	14.7	28	11	M3	16	φ 10		
QCPSC0828-12	12	12										φ 12		
QCPSC0828-14	14	13										φ 14		
QCPSC0828-15	15	13.5						φ 15						
QCPSC0828-16	16	14						φ 16						
QCPSC0828-20	20	16	44	24	28	M3×0.5 Depth 6	17.7	32	16	M4	20	φ 20		
QCPSC0828-25	25	18.5	48					36	18.5			φ 25		
QCPSC1036-10	10	11	46					36	11			38	18.5	φ 10
QCPSC1036-12	12	12												φ 12
QCPSC1036-14	14	13												φ 14
QCPSC1036-15	15	13.5		φ 15										
QCPSC1036-16	16	14		φ 16										
QCPSC1036-20	20	16	50	32	35	M4×0.7 Depth 8	26.2	36	16	M4	27	φ 20		
QCPSC1036-25	25	18.5	52									42	18.5	φ 25
QCPSC2245-20	20	16	56					32	35			M4×0.7 Depth 8	26.2	36
QCPSC2245-25	25	18.5	60	42	18.5	φ 25								

*) Recommended shaft tolerance is JIS f8, g6, h5-h9.

Part Number	Weight (g)	One Touch Push Lock Clamp		Heavy Duty One Touch Push Lock Clamps
QCPSC0828-10	49	QCPS-OG-F QCPS-BK-F QCPS-S-F	0828-6	—
QCPSC0828-12	47			
QCPSC0828-14	45			
QCPSC0828-15	44			
QCPSC0828-16	42			
QCPSC0828-20	55			
QCPSC0828-25	62			
QCPSC1036-10	74	QCPS-OG-D QCPS-BK-D QCPS-S-D	1036-6	
QCPSC1036-12	72			
QCPSC1036-14	69			
QCPSC1036-15	68			
QCPSC1036-16	67			
QCPSC1036-20	86			
QCPSC1036-25	88			
QCPSC2245-20	140	—		QCPSS2245-6-S-F
QCPSC2245-25	160			QCPSS2245-6-S-D

Supplied With

- **QCPSC0828**:
2 of socket-head cap screw (stainless steel),
M3×0.5-20L
- **QCPSC1036**:
2 of socket-head cap screw (stainless steel),
M3×0.5-25L
- **QCPSC2245**:
2 of socket-head cap screw (stainless steel),
M4×0.7-35L

