

# QCWEA


# RETRACTABLE KNOB-LOCKING PINS



Stainless Steel



(OFF position) (ON position)

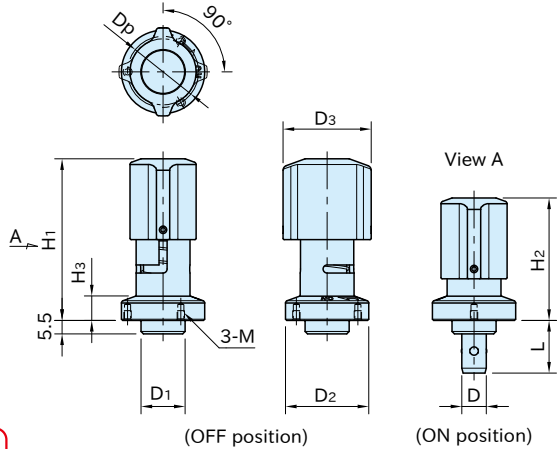

### ★Key Point

Retractable shank type with sensor detection of clamping condition.

Body, Shaft	Wedge	Knob	Ball	Spring
SUS303 stainless steel	SUS420J2 stainless steel Quenched and tempered	SCS13 stainless steel (Equivalent to SUS304)	SUS440C stainless steel Quenched and tempered	SUS304WPB stainless steel

Part Number	Plate Thickness	D (-0.05 -0.16)	D <sub>1</sub> (h9)	D <sub>2</sub>	D <sub>3</sub>	L	H <sub>1</sub>	H <sub>2</sub>	H <sub>3</sub>	M	D <sub>p</sub>	Clamping Force(N)	Holding Force (N)**	Weight (g)
QCWEA0625-10-SUS	3~10*)	6	14	25	28	19.5	58	43.5	6.5	M2×0.4 Depth3	21	30	90	114
QCWEA1034-14-SUS	3~14*)	10	18	34	36	21.5	66	50	10	M3×0.5 Depth4	28	50	150	232

\*) Spacer QCASP is required for plate thinner than 6mm.

\*\*) Exceeding the holding force creates a gap of greater than 0.1mm between plates.

Part Number	Sensor Receptacles	Receptacles
QCWEA0625-10-SUS	QCWE0625-M16-S, QCWE0625-M16-SL	QCBU0608-M12, QCBU0608-M12SUS
QCWEA1034-14-SUS	QCWE1034-M20-S, QCWE1034-M20-SL	QCBU1012-M16, QCBU1012-M16SUS

### Supplied With

- QCWEA0625-10-SUS:  
3 of socket-head cap screws(stainless steel), M2×0.4-5L
- QCWEA1034-14-SUS:  
3 of socket-head cap screws(stainless steel), M3×0.5-6L

### QCWE-M-S

POSITION SENSOR RECEPTACLES




### QCBU-M

BALL-LOCK RECEPTACLES




## Feature

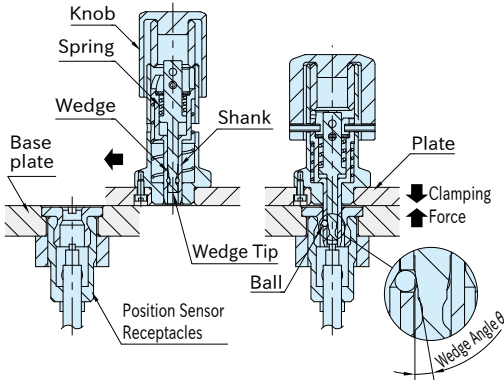

The shank retracts at the unclamping position to enable operations without interference with the base plate.

The wedge of the locking pin pushes out the balls against the tapered surface of the receptacle to clamp the two plates.

## Mechanical Strength

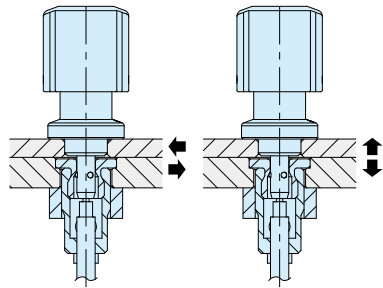


### Shear Strength

### Tensile Strength


Part Number	Heatresistant Temperature(°C)	Shear Strength (N)	Tensile Strength (N)
QCWEA0625-10-SUS	180	3000	500
QCWEA1034-14-SUS		9000	1500

Shear and tensile strength is allowable load and the fastener could break when it receives bigger load.


## How To Use



1. Ensure that the knob is positioned at the "OFF" mark and the shank is retracted.



2. Insert Retractable Knob-locking Pin pressing the knob.





3. Turn the knob to the "ON" mark for clamping. The knob turns lightly by spring force. The tip of the wedge protrudes when clamped, providing reliable contact sensing. Note: Turning the knob to the "OFF" position automatically returns the shaft to the unclamped position by spring force.

## Application Example

### Changes of fixture plates




Sensor detection of fixture plate clamping

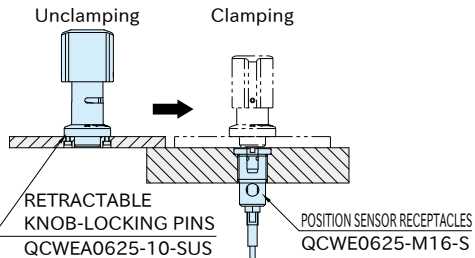

## Application Example

### Lock for doors

Sensor detection of door lock

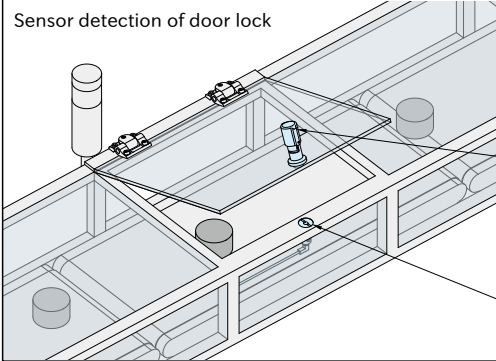

## How To Install

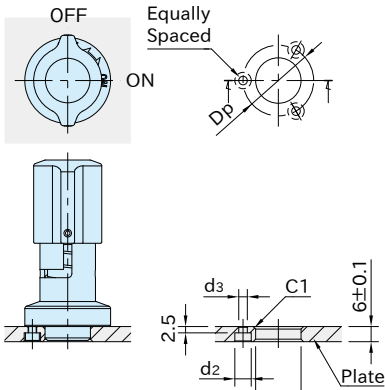


Figure A



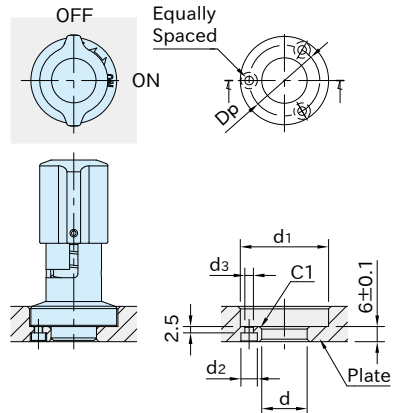


Figure B


Part Number	Plate Thickness	Figure	d ( $+0.10$ / $+0.05$ )	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	D <sub>p</sub>
<b>QCWEA0625-10-SUS</b>	3 or more, under 6		Spacer <a href="#">QCASP</a> is required. *)				
	6	A	14	—	4.4	2.4	21
	Over 6, 10 or less	B		26			
<b>QCWEA1034-14-SUS</b>	3 or more, under 6		Spacer <a href="#">QCASP</a> is required. *)				
	6	A	18	—	6.5	3.4	28
	Over 6, 14 or less	B		35			

\*) Combining Position Sensor Receptacles [\[QCWE-M-S\]](#) with Spacers [\[QCASP\]](#) requires a tolerance of  $\pm 0.05$  for dimension T<sub>1</sub> to ensure stable sensor operation.

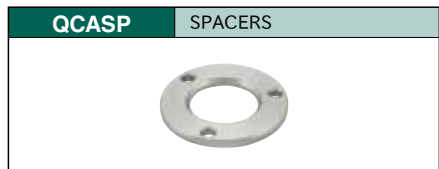

## Accuracy


### ■ Machining Accuracy

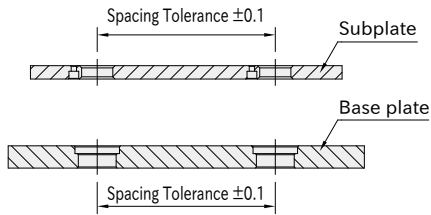

Spacing tolerance on both the subplate and the base plate should be  $\pm 0.1$ .

### ■ Repeatability

Repeatability  $\pm 0.25$

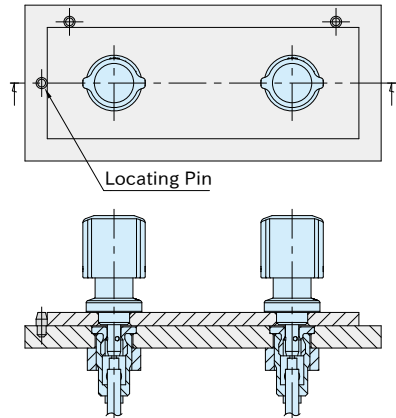

For higher accurate locating, use locating components.

## Reference

- "How To Install" of [QCWE-M-S](#) Position Sensor Receptacles and [QCBU-M](#) Ball-Lock Receptacles
- Spacer [QCASP](#) is required for 3mm or more, under 6mm plate thickness.