

# RG-S


# REVOLVING HANDLES



Original ELESA Model I.701+x, I.731+x, I.741+x




**RG-S**

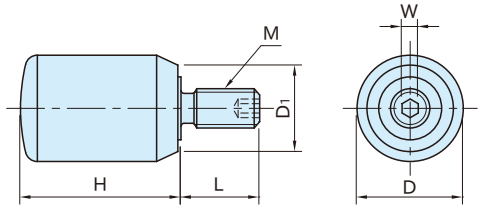

**RG-S**




**RG-SD**

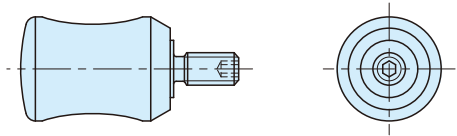

**RG-SD**



**RG-SD-M**

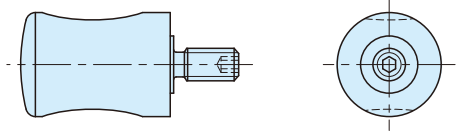

**RG-SD-M**

Type	Handle	Shank
<b>RG-S</b>	Polyamide plastic Black matte	Steel(SUM22L) Zinc plated
<b>RG-SD</b> <b>RG-SD-M</b>		Steel(SUM24L) Zinc plated

## RG-S

Part Number	D	M	D <sub>1</sub>	H	L	W	Weight (g)
<b>RG20S</b>	13.5	M5×0.8	11	20	10	2.5	10
<b>RG23S</b>	16		12.5	23			12

## RG-SD

Part Number	D	M	D <sub>1</sub>	H	L	W	Weight (g)
<b>RG20SD</b>	13.5	M5×0.8	11	20	10	2.5	9
<b>RG23SD</b>	16		12.5	23			11

**RG-SD-M**

Part Number	D	M	H	L	W	Weight (g)
<b>RG20SD0-M4</b>	12	M4×0.7	20	8	2	8.5
<b>RG20SD0-M5</b>		M5×0.8		10	2.5	9
<b>RG23SD0-M4</b>	13	M4×0.7	23	8	2	9.5
<b>RG23SD1-M5</b>		M5×0.8		10	2.5	10
<b>RG23SD2-M5</b>	14.5					11

**Feature**

Provided with a hex. wrench hole at the end of the shank for installation.

**Technical Information**

Working temperature : -20 to 90°C

**Notes**

Use in hot or highly humid circumstances can deteriorate the plastic material properties.