

SIDE-MOUNT BASKET FILTERS



Original ELESa Model PLRB+C, PLRF+C





SFB
(Bayonet-style Flange)

SFT
(Threaded-style Flange)



Note) The cap must be ordered separately.



Part Number	Flange	Mount	Basket	Gasket
SFB	Steel(SUM22L) Zinc plated finish	Glass-fiber reinforced polyamide plastic	Polypropylene plastic Black Matte	Nitrile rubber (NBR)
SFT	Glass-fiber reinforced polyamide plastic Black Matte	Black Matte	Lattice:0.9×3mm	

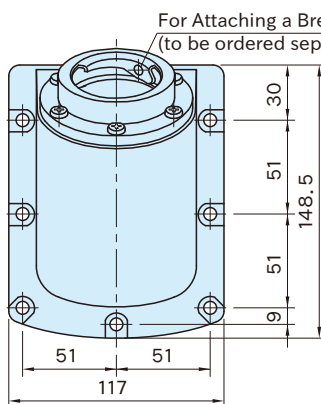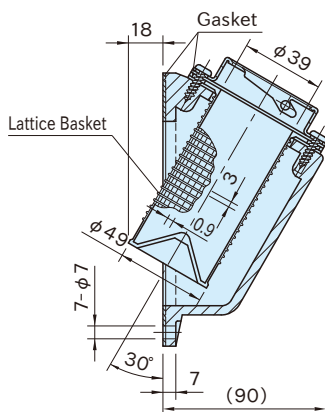

SFB
(Bayonet-style Flange)



SFT
(Threaded-style Flange)

SFB (Bayonet-style Flange)

Part Number	Weight (g)
SFB	355

SFT (Threaded-style Flange)

Part Number	Weight (g)
SFT	335

Features

The gasket prevents oil leak.

Notes

- Do not mount these plugs on the water tank to avoid them from expanding due to water absorption.
- Unresistant to gasoline and alcohol.

Technical Information

Working temperature : Between 0°C and 100°C

Sold Separately Proper Breather Plugs

Basket Filters	Plugs	
SFB	BR-39B	Breather Plugs
	PR-39B	Pressure Breather Plugs
SFT	BM-1.1/4	Breather Plugs
	BR-1.1/4T	Breather Plugs
	PR-1.1/4T	Pressure Breather Plugs
	VLHS-1.1/4FK	Valve Breather Plugs
	VLHS-1.1/4EP	Valve Breather Plugs
	CP-1.1/4	Fluted Plugs

Installation Instructions

- Use M6 screws and washers.
- Ensure that a screw torque applied does not exceed 4Nm to avoid damage to the plastic body.

