


SHR

HOIST RINGS, Side-Swivel Style



| |
|--------------------|
| Body |
| Steel (SCM440) |
| Black oxide finish |

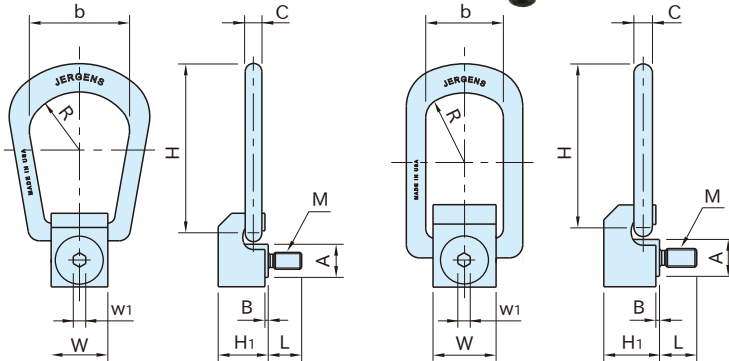

SHR 8,10

SHR 12~20

Strength Factor 5:1

| Part Number | M | L | b | H | C | H ₁ | R | W | w ₁ | A | B | Allowable Load (kN) | Weight (kg) |
|--------------|----------|------|------|-------|------|----------------|------|------|----------------|------|-----|---------------------|-------------|
| SHR 8 | M 8×1.25 | 15.8 | 44.5 | 75.4 | 7.9 | 23.8 | 25.4 | 25.4 | 6 | 15.8 | 1.6 | 2.9 | 0.27 |
| SHR10 | M10×1.5 | 19.8 | | | | | | | | | | 4.5 | |
| SHR12 | M12×1.75 | 23.8 | 50.8 | 120.7 | 12.7 | 40.1 | 38.1 | 41.3 | 10 | 25.4 | 2 | 6.5 | 1.14 |
| SHR16 | M16×2 | 31.8 | | | | | | | | | | 12.6 | |
| SHR20 | M20×2.5 | 39.7 | | | | | | | | | | 20.6 | |

How To Use

Top Pull



Features:

The body swivels 360° and the ring pivots 180°.

Note:

- The load capacity can be reduced depending on applications.
- The allowable load capacity value and tightening torque are stamped on the body top.

Technical Information

Heat resistance : Max. 204°C