

SHR


SIDE-SWIVEL HOIST RINGS




★ **Key Point**
Ring tilts 180° horizontally,
body rotates 360°.

Body

SCM440 steel
Black oxide finished

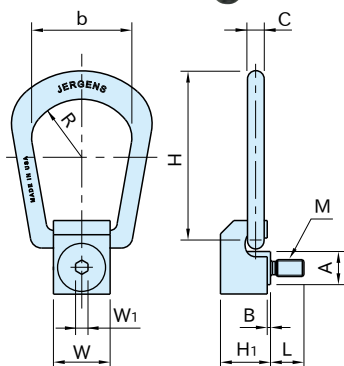

SHR 8,10

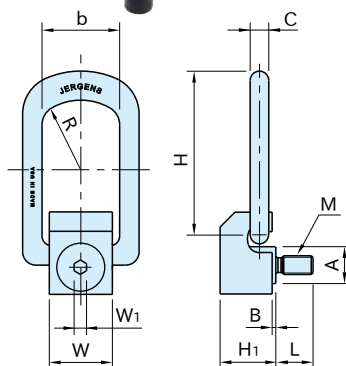

SHR 12~20

Safety Factor 5:1

Part Number	M	L	b	H	C	H ₁	R	W	W ₁	A	B	Allowable Load (kN)	Weight (kg)
SHR 8	M 8x1.25	15.8	44.5	75.4	7.9	23.8	25.4	25.4	6	15.8	1.6	2.9	0.27
SHR10	M10x1.5	19.8										4.5	
SHR12	M12x1.75	23.8	50.8	120.7	12.7	40.1	38.1	41.3	10	25.4	2	6.5	1.14
SHR16	M16x2	31.8										12.6	
SHR20	M20x2.5	39.7										20.6	1.18

How To Use

Top Pull Mount



For angled lifting, see Important Notes for Angled Lifting Operations on How To Use HOIST RINGS.

Feature

- Ring tilts 180° horizontally, body rotates 360° to provide smooth lifting without strain.
- Quality assured through magnetic particle testing.

Note

- Allowable load and tightening torque are stamped on the top of the product.
- Allowable load may be reduced depending on usage.
- For your safety, see Safe Installation Instructions on How To Use HOIST RINGS.

Technical Information

Heatresistant Temperature: 204 °C

Supplied with

1 set of instruction manual / test certificate