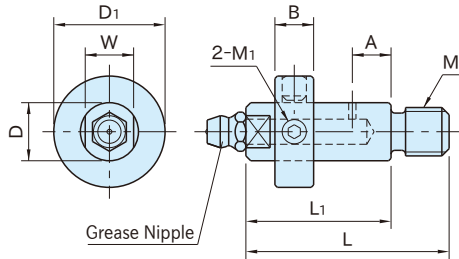


SID**ADJUSTABLE IDLER PINS**

| |
|--------------------|
| Body |
| Steel(S55C) |
| Induction hardened |

| Part Number | D (h6) | L ₁ | L | M | A | D ₁ | B | W | M ₁ | Grease Nipple | Weight (g) |
|----------------|--------|----------------|-----|---------|----|----------------|----|----|----------------|---------------|------------|
| SID1203 | 12 | 30 | 42 | M10×1.5 | 8 | 23 | 8 | 10 | M5×0.8-5L | A-M6F | 65 |
| SID2506 | 25 | 60 | 82 | M20×2.5 | 20 | 45 | 15 | 22 | M6×1 -8L | A-PF1/8 | 370 |
| SID2508 | | 80 | 102 | | 30 | | | | | | 440 |

Features

- The retaining collar can be set at any desired position by tightening and loosening the two setscrews provided on the diameter.
- A nipple is provided for greasing.

Reference

TENSIONER ASSEMBLY EXAMPLES