


**SK****PLASTIC LOBE KNOBS**

Original Elesa Model VL.140FP, VL.640FP

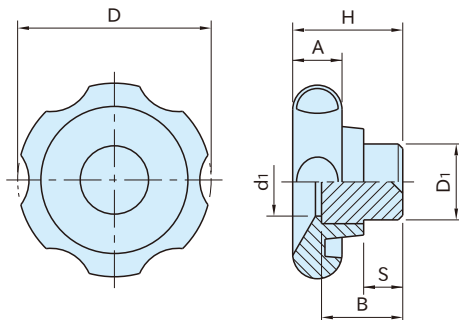

| Type         | Knob                                                                  | Insert                                 |
|--------------|-----------------------------------------------------------------------|----------------------------------------|
| <b>SK</b>    | Phenolic plastic<br>Glossy Finish<br>Black                            | Steel(SUM22L)<br>Black oxide<br>finish |
| <b>SK-PA</b> | Glass-fiber reinforced<br>polyamide plastic<br>Glossy Finish<br>Black |                                        |

**SK** (Phenolic Plastic)

| Part Number  | D  | H  | D <sub>1</sub> | S  | B  | A  | d <sub>1</sub> | Weight (g) |
|--------------|----|----|----------------|----|----|----|----------------|------------|
| <b>SK100</b> | 99 | 44 | 36             | 14 | 34 | 20 | 34             | 405        |

**SK-PA** (Polyamide Plastic)

| Part Number   | D  | H  | D <sub>1</sub> | S  | B  | A  | d <sub>1</sub> | Weight (g) |
|---------------|----|----|----------------|----|----|----|----------------|------------|
| <b>SK50PA</b> | 50 | 29 | 20             | 10 | 21 | 13 | 18             | 72         |
| <b>SK60PA</b> | 61 | 30 | 25             | 11 | 23 | 16 | 24             | 126        |
| <b>SK70PA</b> | 70 | 33 | 30             | 12 | 25 | 18 | 30             | 190        |
| <b>SK80PA</b> | 80 | 40 | 35             | 15 | 30 | 19 | 34             | 300        |

**Features**

Use in hot or highly humid circumstances can deteriorate the plastic material properties.

**Technical Information**

Working temperature : **SK** -20°C to 110°C  
**SK-PA** -30°C to 120°C