


CP157

TAPERED PINS





Body
S45C steel
Black oxide finished
Precision ground

Part Number	D ₁ (g6)	D	H	H ₁	M	Weight (g)	Precision Locating Receivers
CP157-08001L	12	15.5	5	5	M 8×1.25	8	CP780-20038L, CP780-20038D
CP157-12001L	18	24.5	8	6	M12×1.75	27	CP780-28052L, CP780-28052D
CP157-16001L	22	31.5	10	7.5	M16×2	51	CP780-36065L, CP780-36065D
CP157-20001L	30	44.2	13	7.5	M20×2.5	134	CP780-50085L, CP780-50085D



How To Use

Mounting on Fixture Plate

Mounting on Fixture Plate

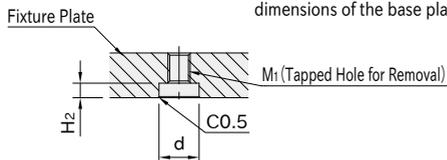

Mounting on Base Plate



See [CP780](#) datasheet for machining dimensions of the base plate.

Part Number	d _(0 -0.02)	H ₂	M ₁	M ₂
CP157-08001L	12	5.5	M 8×1.25	M 6×1
CP157-12001L	18	6.5	M10×1.5	M 8×1.25
CP157-16001L	22	8	M14×1.5	M10×1.5
CP157-20001L	30	8	M18×1.5	M16×2

Reference

How to Remove

For removal, insert a screw into the tapped hole and screw it.

