

QCTHA

RETRACTABLE QUARTER-TURN CLAMPS



QCTHA

(Plastic Knob)



QCTHA-S

(Metal Knob)
(OFF position)



QCTHA-SUS

(Stainless Steel)


★ **One Point**

No interference by retractable shank



QCTHA

(ON position)

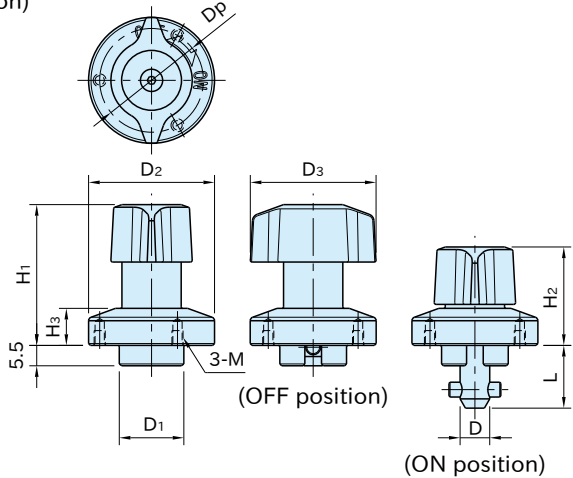

Type	Body	Shank	Pin	Knob	Spring A	Spring B
QCTHA	SUS303 stainless steel	S45C steel Electroless nickel plated	SUS304 stainless steel	Polyamide (glass-fiber reinforced) Black	Equivalent to SWOSC-V steel	SUS304WPB stainless steel
QCTHA-S				SCS13 stainless steel (Equivalent to SUS304)		
QCTHA-SUS				SUS303 stainless steel	SUS304-CSP stainless steel	

Size	Proper Plate Thickness	D (-0.08)	D ₁ (h9)	D ₂	D ₃	L	H ₁	H ₂	H ₃	M	D _p	Clamping Force(N)	Holding Force (N) **	Proper Cam Receptacles
QCTHA	0525-10	3~10 *)	5	14	25	25	15.5	30	20	6.5	M2×0.4 Depth 3	60	60	QCTH0525-N, QCTH0525-B
QCTHA-S														QCTH0525-N-SUS, QCTH0525-B-SUS
QCTHA-SUS	0834-14	3~14 *)	8	18	34	34	17	38	26.5	10	M3×0.5 Depth 4	90	90	QCTH0834-N, QCTH0834-B QCTH0834-N-SUS, QCTH0834-B-SUS

*) Spacer **QCASP** is required for thinner plate than 6mm.

**) The holding force limits the gap between plates within 0.1 mm.

QCTHA (Plastic Knob)		QCTHA-S (Metal Knob)		QCTHA-SUS (Stainless Steel)	
Part Number	Weight (g)	Part Number	Weight (g)	Part Number	Weight (g)
QCTHA0525-10	40	QCTHA0525-10S	50	QCTHA0525-10SUS	53
QCTHA0834-14	100	QCTHA0834-14S	120	QCTHA0834-14SUS	117


Supplied With

- QCTHA QCTHA-S QCTHA-SUS 0525-10: 3 of socket-head cap screws (stainless steel), M2×0.4-5L
- QCTHA QCTHA-S QCTHA-SUS 0834-14: 3 of socket-head cap screws (stainless steel), M3×0.5-6L


QCTH-N/QCTH-B CAM RECEPTACLES




Feature

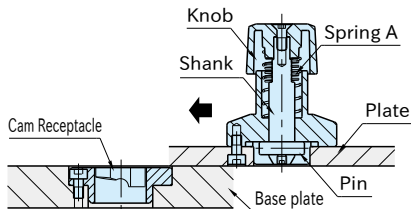

The shank retracts at the unclamping position to enable operations without interference with the base plate.

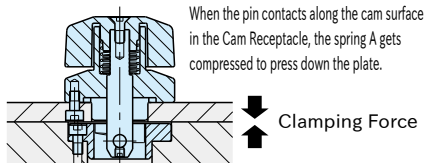

Technical Information

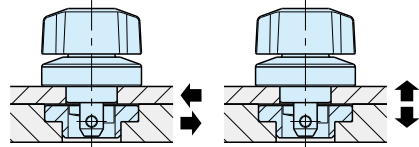


Shear Strength

Tensile Strength


Part Number		Heatresistant Temperature(C)	Shear Strength(N)	Tensile Strength(N)
QCTHA	0525-10			
	0834-14	3200	400	
QCTHA-S	0525-10	180	1800	1200
	QCTHA-SUS 0834-14		3200	

Shear and tensile strength is allowable load and the fastener could break when it receives bigger load.


How To Use



1. Ensure that the knob is positioned at the "OFF" mark and the shank is retracted.




2. Insert Retractable Quarter-Turn Clamp pressing the knob.




3. Turn the knob to the "ON" mark for clamping. The knob clicks when clamped. Turning the knob to the "OFF" position, the shank returns automatically to the unclamping position by the spring.

Application Example


Changes of fixture plates

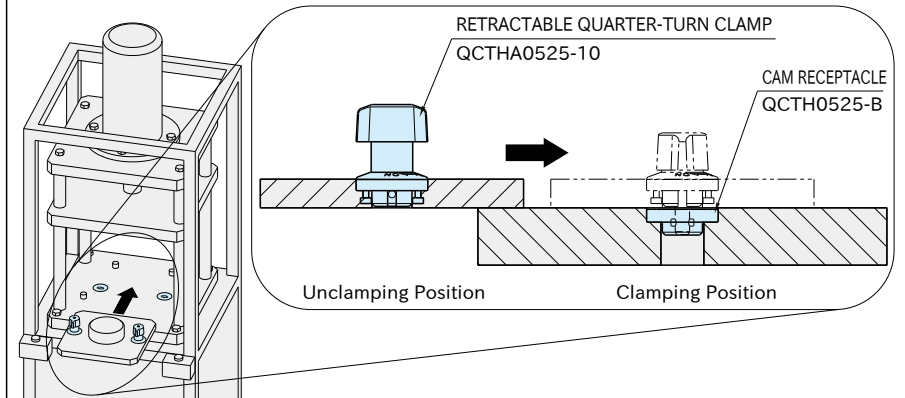

Lock for doors

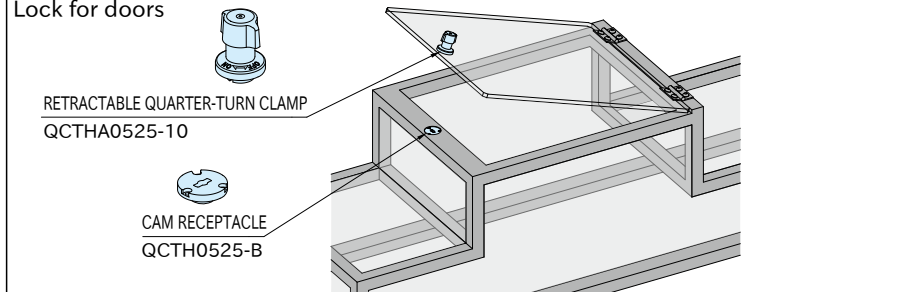

Changes of suction grippers for transfer equipment

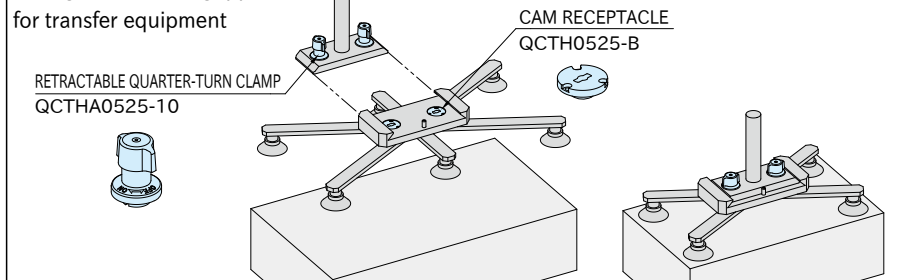

Reference

- "How To Install" of [QCTH-N](#) [QCTH-B](#) [QCTH-N-SUS](#) [QCTH-B-SUS](#) Cam Receptacles
- Spacer [QCASP](#) is required for 3mm or more, under 6mm plate thickness.

How To Install




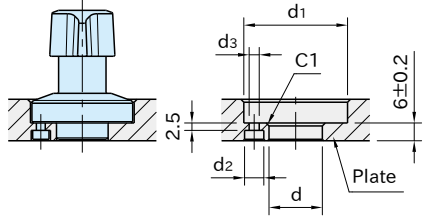


Figure A

Figure B

Part Number	Proper Plate Thickness	Figure	D ($+0.10$ / $+0.05$)	d ₁	d ₂	d ₃	Dp
QCTHA QCTHA-S QCTHA-SUS	3 or more, under 6		Spacer QCASP is required.				
	6	A	14	—	4.4	2.4	21
	Over 6, 10 or less	B		26			
0834-14	3 or more, under 6		Spacer QCASP is required.				
	6	A	18	—	6.5	3.4	28
	Over 6, 14 or less	B		35			

QCASP SPACERS

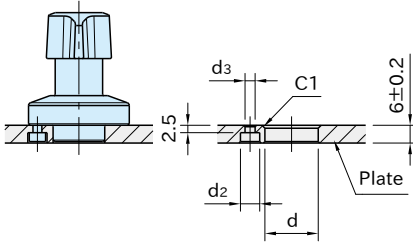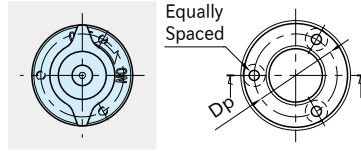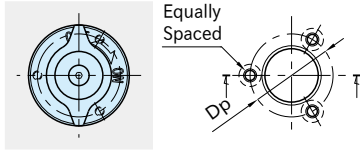

Accuracy


■ Machining Accuracy



Spacing tolerance on both the subplate and the base plate should be ± 0.04 .

■ Repeatability

Repeatability ± 0.1

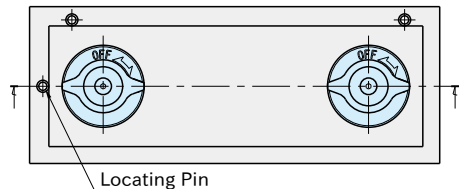

For higher accurate locating, use locating components.